

(12) UK Patent Application (19) GB (11) 2 312 350 (13) A

(43) Date of A Publication 22.10.1997

(21) Application No 9607910.8

(22) Date of Filing 17.04.1996

(71) Applicant(s)

Quantel Limited

(Incorporated in the United Kingdom)

Pear Tree Lane, NEWBURY, Berkshire, RG14 2LT,
United Kingdom

(72) Inventor(s)

David Steele

David Throup

(74) Agent and/or Address for Service

R G C Jenkins & Co

26 Caxton Street, LONDON, SW1H 0RJ,
United Kingdom

(51) INT CL⁶

H04N 9/64 5/208

(52) UK CL (Edition O)

H4F FD1B9 FD1D1 FD12X FD30B FD30J FD30K FD30T1
FD30T3 FD31X FGY

(56) Documents Cited

EP 0705043 A1 EP 0465892 A2 EP 0340648 A2
EP 0302500 A2 EP 0224302 A1

(58) Field of Search

UK CL (Edition O) H4F FGXE FGXX FGY FHHX
INT CL⁶ H04N 5/208 9/64

(54) Colour video signal processing for image enhancement

(57) An image processing system 20 comprises a format converter 21 for receiving a first signal eg a luminance signal, having a larger bandwidth and a second signal eg. a chrominance signal, having a smaller bandwidth, the first and second signals together representing an image. A processor 23 is arranged to process the first and second signals to produce signals representing a manipulated version of the image. The system further comprises a deriving circuit 25 which is arranged to derive from information in the larger bandwidth signal additional information for the smaller bandwidth signal. The deriving circuit derives an unknown value of a pixel as represented by the smaller bandwidth signal from known values of the pixel and the pixels adjacent thereto as represented by the larger bandwidth signal and from known values of the adjacent pixels as represented by the smaller bandwidth signal. The deriving circuit facilitates conversion of the first and second signals into another signal format representing the image.

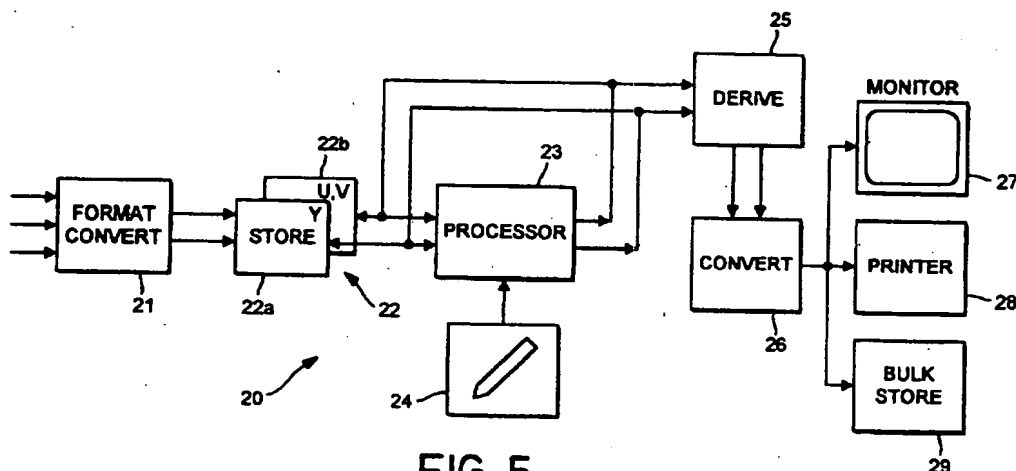
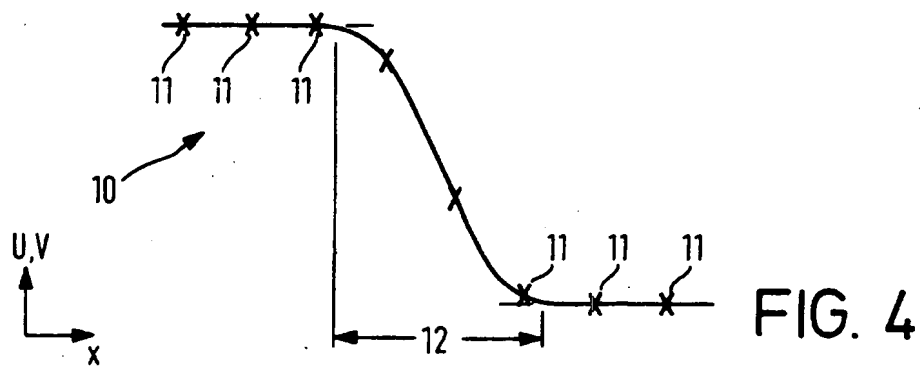
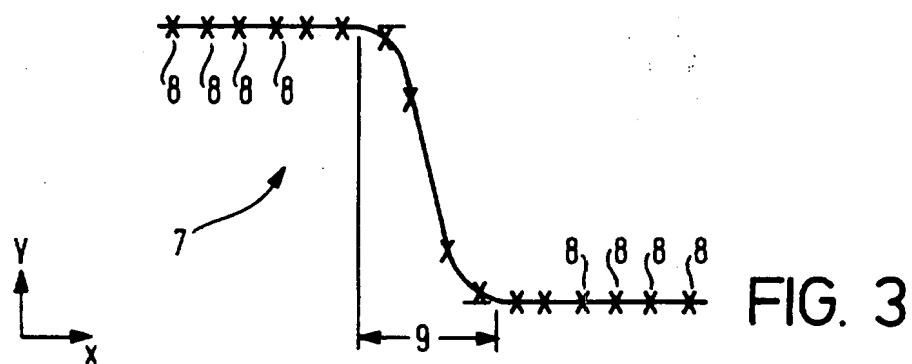
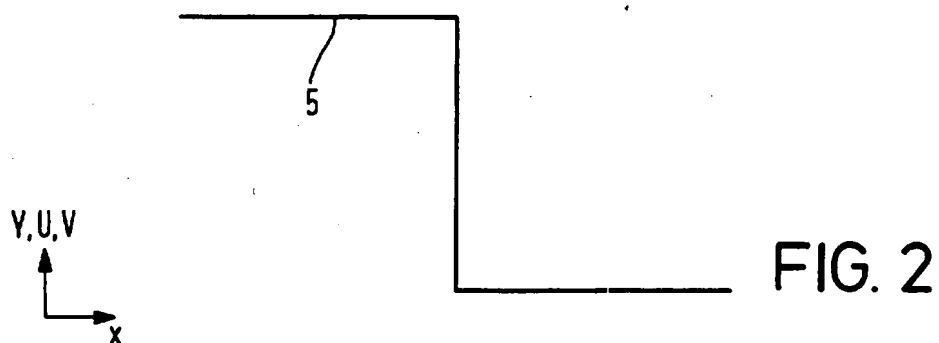
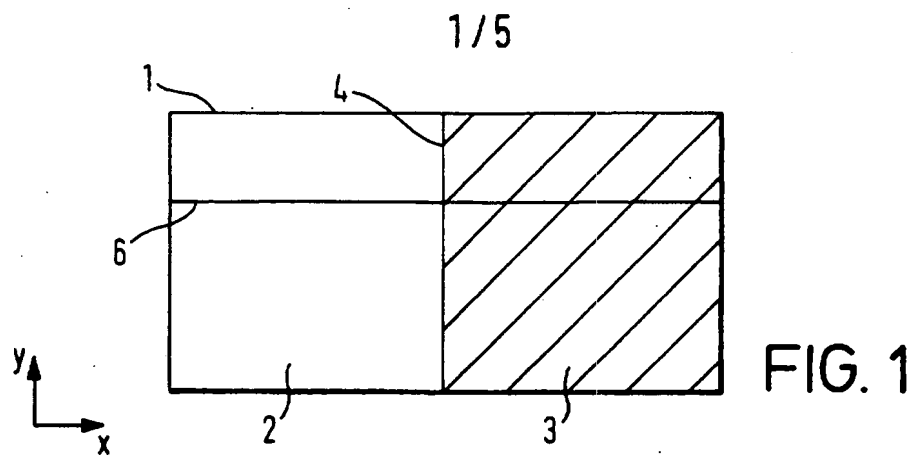


FIG. 5



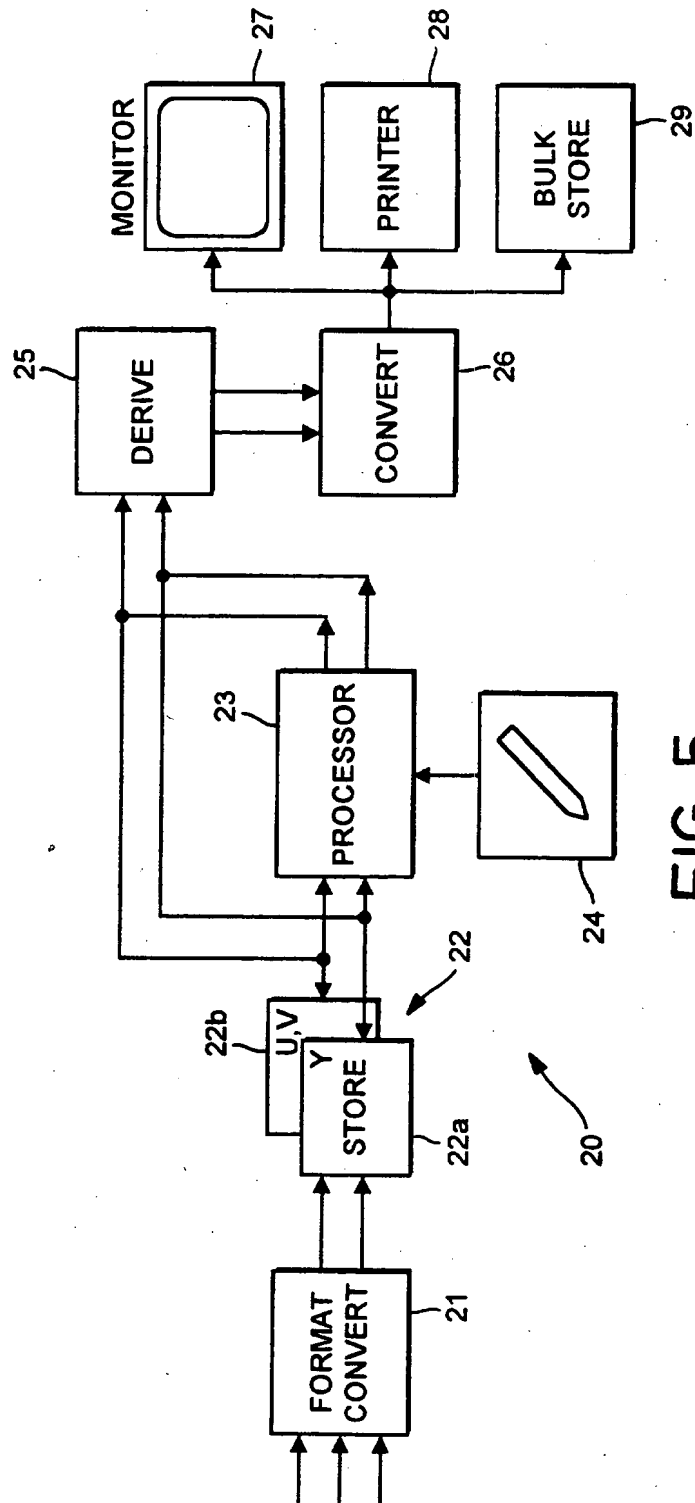


FIG. 5

3/5

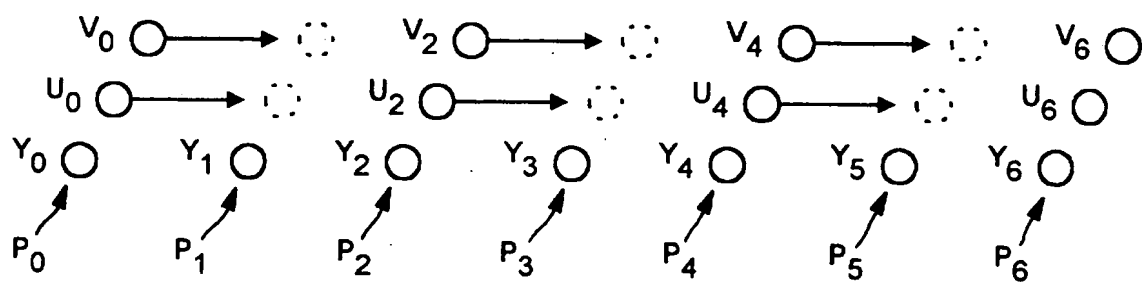


FIG. 6

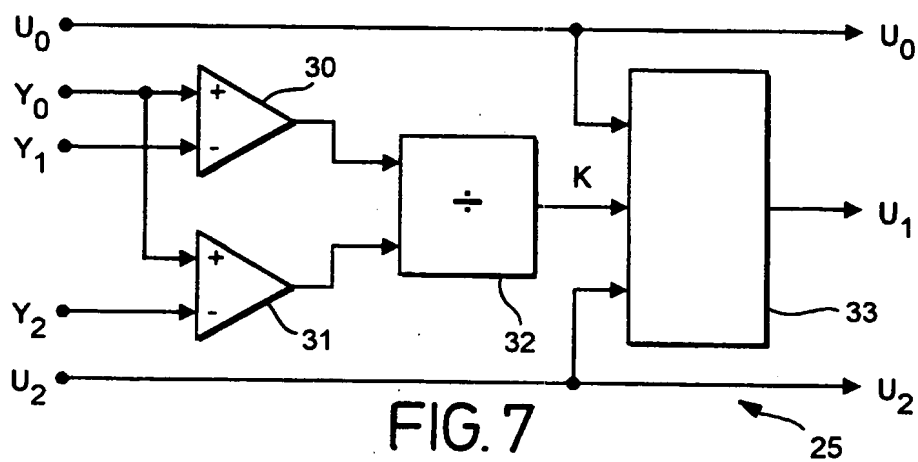


FIG. 7




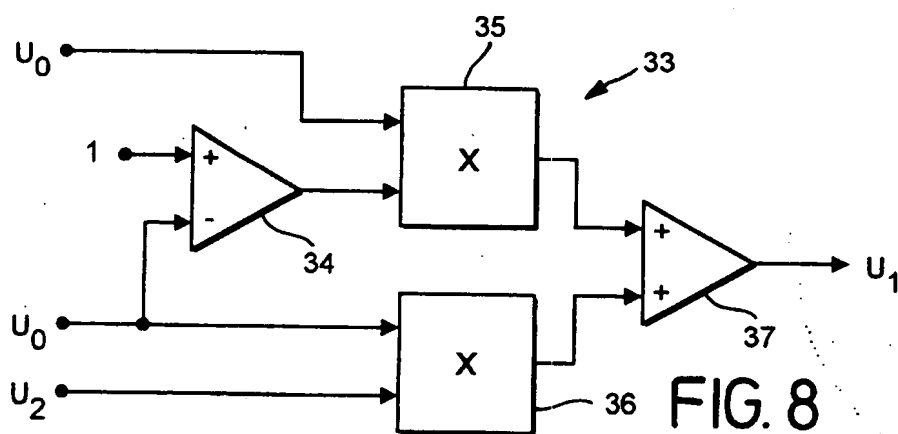


FIG. 8

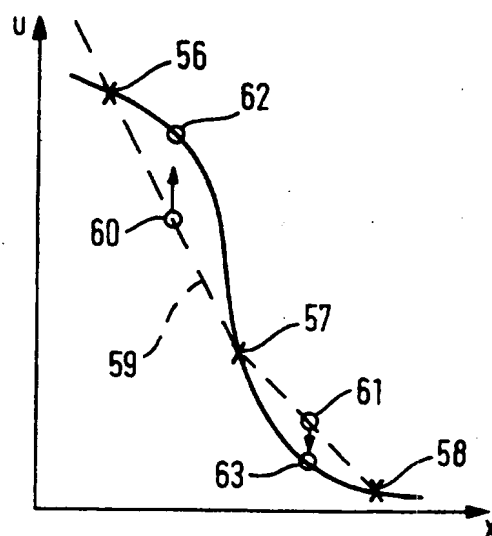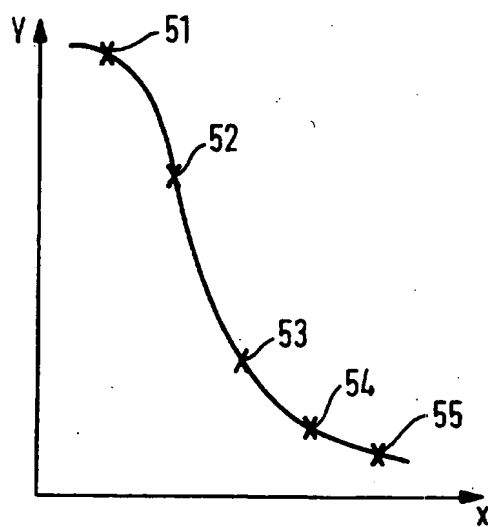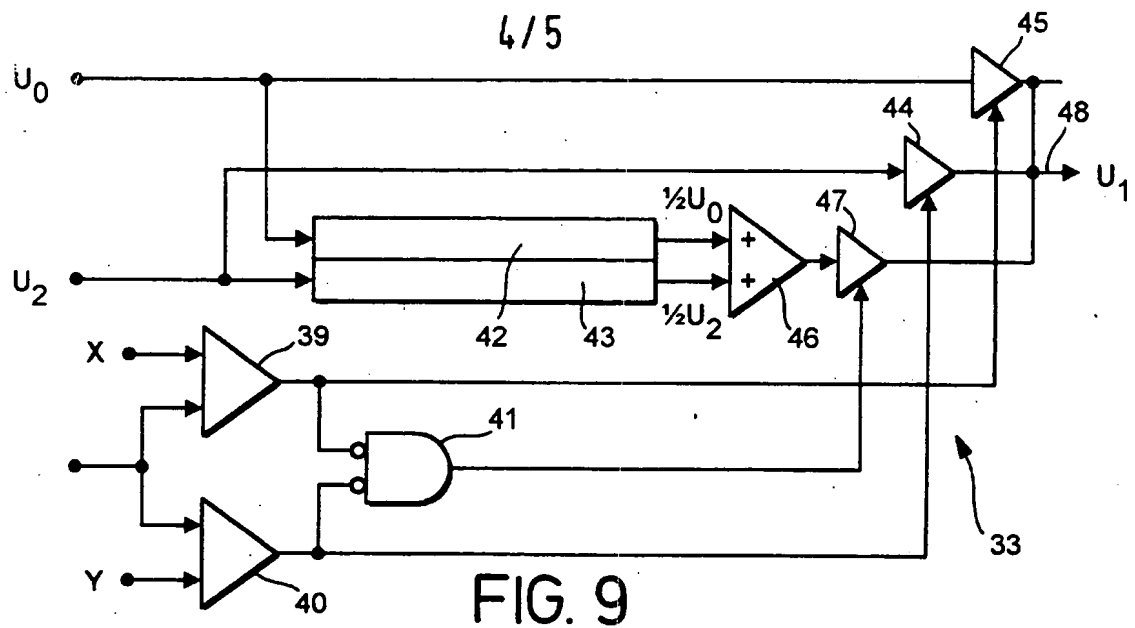

5/5

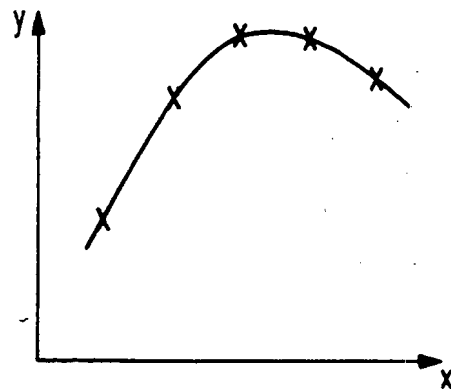


FIG. 12

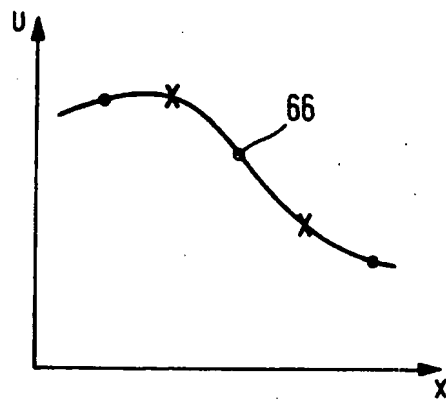


FIG. 13

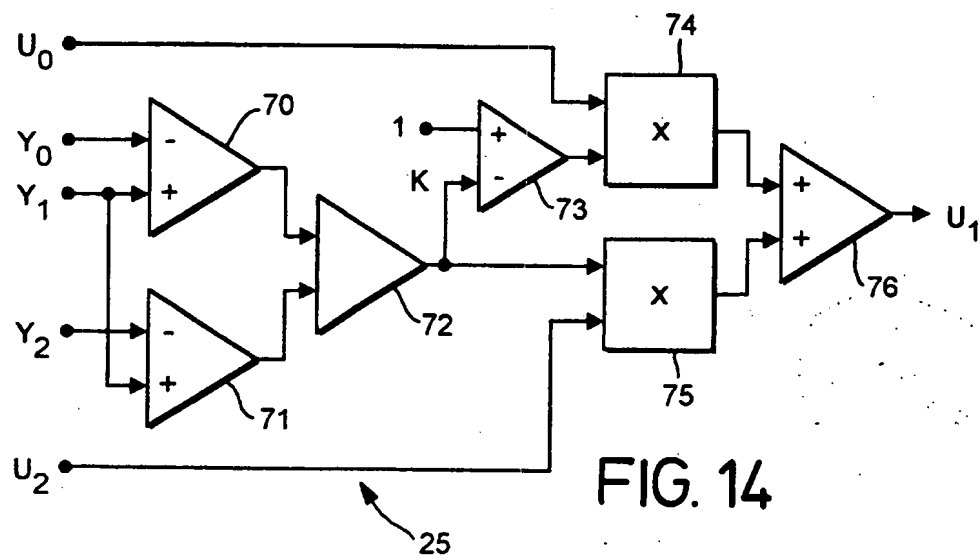


FIG. 14

A SIGNAL PROCESSING SYSTEM

The invention relates to a signal processing system. More specifically the invention relates to a signal processing system for processing a pair of signals carrying related information with one of the signals having a larger bandwidth and the other of the signals having a smaller bandwidth.

Images can be represented in an electrical environment by signals that define such image attributes as the intensity and colour of elements of the images. In the past, television pictures were represented by analog signals defining the luminance (Y) and the colour difference (R-Y) and (B-Y), ie chrominance, of the picture elements. More recently digital signals have been used to represent television pictures. Digital signals are highly resistant to degradation and can be readily processed to create special effects in the television picture.

In one digital standard, the so-called D1 standard, a component signal is used consisting of luminance (Y) and chrominance (U, V) signals that are sampled at a ratio of 4:2:2. The luminance signal is sampled at a rate of 13.5 MHz and the two chrominance signals are each sampled at a rate of 6.75 MHz. That is to say, the digital luminance signal has a bandwidth of 13.5 MHz and the digital chrominance signals each have a bandwidth of 6.75 MHz. The

bandwidth is a measure of the detail in the picture. Sampling in the 4:2:2 ratio means that the horizontal resolution of the colour in the television picture is halved, but because it is the luminance that contains the picture detail this reduction in horizontal colour resolution is an acceptable compromise that enables the data rate to be reduced.

As a component signal, the D1 signal is well suited to studio and post-production work. However, under some circumstances unacceptable image degradation can occur as a direct consequence of the reduced chrominance bandwidth. Figure 1 of the accompanying drawings illustrates a simple picture 1 comprising two areas of different colours 2, 3, say yellow and black, with an abrupt transition 4 between the two areas. Figure 2 of the accompanying drawings shows a signal 5 of infinite bandwidth representing a line 6 in the picture 1. The infinite bandwidth of the signal 5 means that signal can represent exactly the transition 4 between the two areas 2, 3. Ideally, the luminance (Y) and chrominance (U, V) signals would represent the line 6 in this manner. However, this does not happen in practice because of the limited bandwidth of the signals. Figure 3 of the accompanying drawings shows a luminance signal 7 comprising multiple sample values at evenly spaced intervals. The effect of limiting the bandwidth in

the signal 7 is to produce a transitional zone 9 in the signal extending to each side of the boundary 4 in the picture. Figure 4 of the accompanying drawings shows a signal 10 having half the bandwidth of the signal 7 and corresponding to one of the chrominance signals (U or B). The effect of halving the bandwidth of the signal 10 as compared to that of the signal 7 is to halve the number of sampling points 11 that comprise the signal 10 and to increase the size of the transitional zone 12 on each side of the boundary 4 in the picture.

When the picture represented by the luminance signal 7 and chrominance signals 10 is displayed on a monitor the boundary 4 between the two areas 2, 3 will not be seen as a sharp line but will instead be seen as a blurred region that may contain unwanted colours between yellow and black. In some situations, especially when the image is static as opposed to part of a video sequence, this blurring of the boundary 4 is unacceptable.

The invention aims to minimise the above problems.

According to one aspect of the invention there is provided a signal processing system for processing a pair of signals carrying related information with one of the signals having a larger bandwidth and the other of the signals having a smaller bandwidth, in which

system additional information for the smaller bandwidth signal is derived from information in the larger bandwidth signal.

According to another aspect of the invention
5 there is provided an image processing apparatus comprising: a source for supplying a first signal having a larger bandwidth and a second signal having a smaller bandwidth, the first and second signals together representing an image; a processor for
10 processing the first and second signals to produce manipulated first and second signals which together represent a manipulated version of the image; and a deriving circuit for deriving from the information in the larger bandwidth signal additional information for
15 the smaller bandwidth signal, and thereby facilitating conversion of the first and second signals into another format representing the image.

According to a further aspect of the invention there is provided a circuit for converting incoming
20 signals, defining a multiplicity of pixels in one format comprising a first signal containing information for each pixel and a second signal containing information for every other pixel, into outgoing signals, defining said multiplicity of pixels
25 in another format comprising plural signals each containing information for each pixel, the circuit comprising: a differential stage for determining a

difference between a zeroth pixel value and a first pixel value in the first signal, and a difference between the zeroth pixel value and a second pixel value in the first signal; a divider stage for
5 dividing the difference between the zeroth and first pixel values by the difference between the zeroth and second pixel values to produce a constant value; and a processing stage for calculating a value for the first pixel in the second signal from values for the
10 zeroth pixel and the second pixel in the second signal depending on the constant value.

The above and further features of the invention are set forth with particularity in the appended claims and together with advantages thereof will
15 become clearer from consideration of the following detailed description of exemplary embodiments of the invention given with reference to the accompanying drawings.

In the drawings:

20 Figure 1 illustrates a simple picture comprising two areas of different colours, as already described herein;

Figure 2 shows a signal of infinite bandwidth representing a line in the picture of Figure 1, as
25 already described herein;

Figure 3 shows a signal of finite bandwidth representing luminance of the line in Figure 1, as

already described herein;

Figure 4 shows a signal of reduced finite bandwidth representing the line in Figure 1, as already described herein;

5 Figure 5 is a schematic functional block diagram of a system embodying the invention;

Figure 6 shows pixels comprising luminance and chrominance data elements;

10 Figure 7 shows details of a deriving circuit used in the system of Figure 5;

Figure 8 shows a first embodiment of a selector circuit used in the deriving circuit of Figure 7;

15 Figure 9 shows a second embodiment of the selector circuit used in the deriving circuit of Figure 7;

Figure 10 is a graph showing a portion of a luminance signal;

Figure 11 is a graph showing a corresponding portion of a chrominance signal;

20 Figure 12 is a graph showing a portion of a luminance signal;

Figure 13 is a graph showing a corresponding portion of a chrominance signal; and

25 Figure 14 shows another configuration of the deriving circuit.

Referring now to Figure 5 of the drawings there is shown an image processing system 20 comprising a

format converter 21 for receiving signals from an external source (not shown) and supplying signals to a store 22. The format converter 21 is provided to enable incoming signals to be supplied in any convenient format, eg RGB, CMYK, etc., and converted into a YUV format suitable for processing by the system. Format converters are per se well known and there is therefore no need to describe the format converter 21 in any further detail herein. The store 22 comprises two parts 22a, 22b respectively for storing data representing the luminance (Y) and chrominance (U, V) components of the data from the format convertor. The data in the store represents a multiplicity of pixels which together form a picture.

As shown in Figure 6 of the accompanying drawings each pixel (pixel 0, pixel 1, pixel 2, etc.) has luminance data (Y_0 , Y_1 , Y_2 , etc.) associated with it. Every other pixel (pixel 0, pixel 2, pixel 4, etc.) has chrominance data (U_0 , V_0 , U_2 , V_2 , U_4 , V_4 , etc.) associated with it. The chrominance data is shared between two pixels (e.g. pixel 0 and pixel 1) as already described herein above.

The system 20 further comprises a processor 23. The processor 23 is arranged to operate in the manner described in US Patent 4514818 and corresponding British Patent 2089625, the teachings of which are incorporated herein by reference, and the system

therefore includes a stylus and touch tablet device 24 to which the processor 23 is responsive. The YUV data in the store 22 is in a format suitable for processing by the processor 23 as described in the above mentioned patents. Thus, the processor 23 is arranged to respond to user manipulation of the stylus and touch tablet device to read data from the store 22, modify the data and write the modified data back to the store 22 replacing the data originally stored therein. In this way, retouching of an image by electronic "painting" or "drawing" can be effected.

The system 20 further comprises a deriving circuit 25 connected to receive YUV data either directly from the store 22 or from the processor 23. As will be described in greater detail hereinafter, the deriving circuit 25 is arranged to derive additional information for the UV signals from the corresponding Y signals so as to provide separate UV data for each pixel in the picture. That is to say, as shown in Figure 6, the deriving circuit 25 serves to derive UV data for pixel 1, pixel 3, pixel 5 etc. Data output from the deriving circuit 25 is received by another format converter 26 which converts the data into a desired format. For example, the format converter 26 may be arranged to convert the data into an RGB format for display of the image on a monitor 27, or it may be arranged to convert the data into a

CMYK format for printing of the image by a printer 28. Of course, the converter 26 is not limited to converting into RGB or CMYK formats, and may for example be arranged to convert the data into the so-called D2 format for storage in a bulk store device
 5 such as a video tape recorder (VTR).

Figure 7 of the accompanying drawings shows the deriving circuit 25 in greater detail. The deriving circuit comprises two subtractors 30, 31 connected to receive luminance values Y_0 , Y_1 and Y_2 for three adjacent pixels. The subtractor 30 is arranged to calculate the magnitude of the difference between Y_0 and Y_1 , i.e. $|Y_1 - Y_0|$. The subtractor 32 is arranged to calculate $|Y_2 - Y_0|$. The values from the
 10 subtractors 30, 31 are input to a divider circuit which calculates a value K as the ratio of $|Y_1 - Y_0|$ and $|Y_2 - Y_0|$ that is to say, the divider calculates
 15 $\frac{|Y_1 - Y_0|}{|Y_2 - Y_0|}$. The value output from the divider 32 is a
 20 constant value K, and it will be noted that the constant value K is calculated purely from the luminance values of consecutive pixels Y_0 to Y_2 .

The constant value K is input to a selecting
 25 circuit 33 together with chrominance values U_0 and U_2 for the zeroth pixel and the second pixel in the sequence of three adjacent pixels. In the remainder of this description reference will be made only to the

U values of the chrominance signals because the V values of the chrominance signals are treated in exactly the same way as the U values. The selector circuit 33 calculates from U_0 , U_2 and K a value for use
5 as the missing value for pixel 1, i.e. the selector calculates the value for U_1 .

The selector 33 can be configured to work in two different modes. Figure 8 of the accompanying drawings shows a first embodiment of the selector
10 circuit 33 in greater detail. In this embodiment, the selector circuit 33 comprises a subtractor 34, two multipliers 35, 36 and an adder 37. The subtractor 34 is arranged to subtract the value K from a value corresponding to unity. The value $(1 - K)$ can
15 therefore be said to be the inverse of the constant K. The chrominance value U_0 is input to the multiplier 35 together with the inverse constant $(1 - K)$ to produce the value $(1 - K)U_0$. The chrominance value U_2 is input to the multiplier 36 together with the constant K to
20 produce an output KU_2 . The outputs from the multipliers 35 and 36 are input to the adder 37 which outputs the value corresponding to $U_1 = (1-K)U_0 + KU_2$. Thus, in this embodiment the selector 33 is arranged to derive the unknown chrominance value of pixel 1
25 from the known chrominance values of pixel 0 and pixel 2, both of which are adjacent to pixel 1, and from a constant K which, in turn, is derived from known

luminance values of pixel 0, pixel 1 and pixel 2. The selector 33 thus calculates a value for U_1 as a weighted summation of the values for U_0 and U_2 .

5 A second embodiment of the selector 33 is shown in figure 9 of the accompanying drawings. In this embodiment the selector 33 comprises a first comparator 39 which compares the value K with a predetermined value X and outputs a signal if K is less than X . The selector 33 further comprises a
10 second comparator 40 which compares the constant value K with a predetermined value Y and outputs a signal if K is greater than Y . The signals output from the comparators 39, 40 are applied to inverting inputs of an AND circuit 41 which therefore outputs a signal if
15 $X < K < Y$.

The chrominance signals U_0 and U_2 are input to a pair of shift registers 42, 43 and to respective tristate buffers 44, 45. The shift registers also receive the output from the AND circuit 41. In
20 response to the AND circuit 41 outputting a signal the shift registers 42, 43 shift the digital values U_0 , U_2 one place to the left, that is the shift registers divide both the digital value U_0 and the digital value U_2 by two. The chrominance data output from the two
25 shift registers is added together by an adder 46 which outputs a value equal to $\frac{1}{2} U_0 + \frac{1}{2} U_2$. The output from the adder 46 is applied to a tristate buffer 47. The

outputs from the tristate buffers 44, 45 and 47 are connected together at line 48. The tristate buffer 44 is driven by the output from the first comparator 39 and the tristate buffer 45 is driven by the output from the second comparator 40. The value U_1 output on line 48 is U_0 if K is less than X , is U_2 if K is greater than Y and is $\frac{1}{2} U_0 + \frac{1}{2} U_2$ if $X < K < Y$.

Any value between 0 and 1 can of course be selected for X and Y , but in practice values of $X = \frac{1}{4}$ and $Y = \frac{3}{4}$ work well. These values of X and Y give equal spacing between known and unknown pixels in the calculation.

The effect of calculating unknown chrominance values in the drive circuit 25 as above described is illustrated in Figures 10 and 11 of the accompanying drawings. Figure 10 shows how the luminance (Y) signal changes with distance (x) along a line in a picture. The luminance signal comprises plural samples 51 to 55 at equally spaced intervals along the line. The chrominance signal likewise comprises a plurality of evenly spaced samples 56 to 58, but the spacing between samples is twice that in the luminance signal. If one were simply to take as the unknown luminance value the average between two known values one would develop a signal represented by the broken line 59 in Figure 11. The broken line 59 comprises unknown luminance samples 60, 61 which are taken to

lie on a straight line between adjacent samples 56, 57 and 57, 58. The true values of the unknown samples is represented by points 62 and 63 and it should be noted that there is a considerable difference between the true value 62 and the calculated average value 60 and between the true value 63 and the calculated average value 61.

It will also be noted that the form of the luminance signal in Figure 10 is similar (albeit not identical) to that of the chrominance signal in Figure 11. The deriving circuit derives unknown pixel values using a constant calculated from the slope of the luminance signal. The effect of the calculation is therefore to produce unknown chrominance values such that the slope of the chrominance signal about the unknown chrominance value tends to follow the slope of the luminance signal at the corresponding point.

Figures 12 and 13 of the accompanying drawings show a special case where an unknown chrominance value is at a position corresponding to a peak in the luminance signal. In this situation the deriving circuit 25 is reconfigured to the arrangement shown in Figure 14 of the accompanying drawings.

Difference values between Y_1 and Y_0 and between Y_1 and Y_2 are calculated by way of subtractors 70, 71. The difference values output from the subtractors 70, 71 are compared by comparator 72 which is arranged to

output a value $K = 0$ if the difference between Y_1 and Y_0 is less than the difference between Y_1 and Y_2 , and to output a value $K = 1$ if the difference between Y_1 and Y_0 is greater than the difference between Y_1 and Y_2 . The value K is input to a subtractor 73 which calculates the inverse value $(1 - K)$.

The values K and $(1 - K)$ are applied to respective multipliers 74, 75 together with values for U_0 and U_2 . The signals output from the multiplier 74, 75 are added together by way of an adder 76 whose output corresponds to the value for U_1 . The effect of setting K either to 0 or to 1 is to cause the deriving circuit shown in Figure 14 to select either the value U_0 or the value U_2 as the value for U_1 .

It will be appreciated from consideration of Figure 14 and the foregoing description that the value that is chosen for U_1 is the nearest of the values U_0 and U_2 . It will also be appreciated by those possessed of the appropriate skills that the Figure 14 circuit is equally applicable to calculating chrominance values in the vicinity of a trough or minimum in the luminance signal.

Having thus described the present invention by reference to preferred embodiments it is to be well understood that the embodiments in question are exemplary only and that modifications and variations such as will occur to those possessed of appropriate

knowledge and skills may be made without departure from the spirit and scope of the invention as set forth in the appended claims and equivalents thereof.

CLAIMS:

1. A signal processing system for processing a pair of signals carrying related information with one of the signals having a larger bandwidth and the other of the signals having a smaller bandwidth, in which
5 system additional information for the smaller bandwidth signal is derived from information in the larger bandwidth signal.
2. A signal processing system as claimed in claim 1,
10 wherein each of the signals represents the information as a sequence of discrete data points, and an unknown data point at an instant of time in the smaller bandwidth signal is derived by referring to known data points in the larger bandwidth signal in a period of
15 time surrounding the instant of the unknown data point in the smaller bandwidth signal.
3. A signal processing system as claimed in claim 2, wherein the unknown data point is derived by referring to known data points in the smaller bandwidth signal.
- 20 4. A signal processing system as claimed in claim 2 or 3, wherein the unknown data point is derived by determining differences in values between the known

data points in the larger bandwidth signal.

5. A signal processing system as claimed in claim 3,
wherein the unknown data point is derived by
determining differences in values between the known
5 data points in the larger bandwidth signal and using
the differences to interpolate between known data
points in the smaller bandwidth signal.

6. A signal processing system as claimed in claim 3,
wherein the unknown data point is derived by
10 determining a difference in values between the known
data points in the larger bandwidth signal, comparing
the difference with a first predetermined value, and
selecting as the value of the unknown data point that
of the known data point preceding the unknown data
15 point in the lower bandwidth signal if the difference
is less than the first predetermined value.

7. A signal processing system as claimed in claim 6,
wherein the value of the unknown data point is
selected to be that of the known data point succeeding
20 the unknown data point in the lower bandwidth signal
if the difference is greater than the first
predetermined value.

8. A signal processing system as claimed in claim 6,

wherein the unknown data point is derived by comparing the difference with a second predetermined value and selecting as the value of the unknown data point that of the known data point succeeding the unknown data point in the lower bandwidth signal if the difference is greater than the second predetermined value.

9. A signal processing system as claimed in claim 8, wherein the value of the unknown data point is derived by averaging the values of the preceding data point and the succeeding data point if the difference is greater than the first predetermined value and less than the second predetermined value.

10. A signal processing system as claimed in claim 9, wherein the difference is normalized and the predetermined values are selected to be in the value range zero to unity.

11. A signal processing system as claimed in claim 10, wherein the first predetermined value is selected to be 0.25 and the second predetermined value is selected to be 0.75.

12. A signal processing system as claimed in any preceding claim, wherein the signals represent an image.

13. A signal processing system as claimed in claim 12, wherein the larger bandwidth signal is a luminance signal and the smaller bandwidth signal is a chrominance signal.

5 14. A signal processing system as claimed in any preceding claim, wherein the larger bandwidth signal has a bandwidth at least twice that of a smaller bandwidth signal.

15. An image processing apparatus comprising:

10 a source for supplying a first signal having a larger bandwidth and a second signal having a smaller bandwidth, the first and second signals together representing an image;

15 a processor for processing the first and second signals to produce manipulated first and second signals which together represent a manipulated version of the image; and

20 a deriving circuit for deriving from the information in the larger bandwidth signal additional information for the smaller bandwidth signal, and thereby facilitating conversion of the first and second signals into another format representing the image.

16. An image processing apparatus as claimed in claim

15, wherein each of the first and second signals represent the image as discrete pixels and the deriving circuit is arranged to derive an unknown value of a pixel as represented by the smaller bandwidth signal from known values of the pixel and pixels adjacent thereto as represented by the larger bandwidth signal and from known values of the adjacent pixels as represented by the smaller bandwidth signal.

17. An image processing apparatus as claimed in claim 16, wherein the deriving circuit is arranged to derive the unknown pixel value by determining a difference in values between the known pixels in the larger bandwidth signal, comparing the difference with a first predetermined value, and selecting as the value of the unknown pixel that of the known pixel preceding the unknown pixel in the lower bandwidth signal if the difference is less than the first predetermined value.

18. An image processing apparatus as claimed in claim 17, wherein the deriving circuit is arranged to select the value of the unknown pixel to be that of the known pixel succeeding the unknown pixel in the lower bandwidth signal if the difference is greater than the first predetermined value.

19. An image processing apparatus as claimed in claim 17, wherein the deriving circuit is arranged to derive the unknown pixel value by comparing the difference with a second predetermined value and selecting as the value of the unknown pixel that of the known pixel succeeding the unknown pixel in the lower bandwidth signal if the difference is greater than the second predetermined value.
20. An image processing apparatus as claimed in claim 19, wherein the deriving circuit is arranged to derive the unknown pixel value by averaging the values of the preceding and succeeding pixels if the difference is greater than the first predetermined value and less than the second predetermined value.
21. An image processing apparatus as claimed in any of claims 15 to 20, wherein the larger bandwidth signal represents the luminance of the image and the smaller bandwidth signal represents the chrominance of the signal.
22. An image processing apparatus as claimed in any of claims 15 to 21, further comprising a converter for converting signals output from the deriving circuit into signals in another format representing the image.

23. An image processing apparatus as claimed in claim 22, further comprising a monitor, and wherein the converter is operable to convert the signals from the deriving circuit into a format suitable for display of the image on the monitor.

24. An image processing apparatus as claimed in claim 22, further comprising a printer, and wherein the converter is operable to convert the signals from the deriving circuit into a format suitable for printing of the image by the printer.

25. An image processing apparatus as claimed in any of claims 15 to 24, wherein the source comprises a store, and the process is operable to read said first and second signals for selected pixels from the store for manipulation thereof and to write said manipulated first and second signals to the store replacing the first and second signals represented the selected pixels previously stored therein.

26. An image processing apparatus as claimed in any of claims 15 to 25, further comprising a user operable input device, and wherein the processor is responsive to user manipulation of the input device to effect said processing.

27. A circuit for converting incoming signals, defining a multiplicity of pixels in one format comprising a first signal containing information for each pixel and a second signal containing information for every other pixel, into outgoing signals, defining said multiplicity of pixels in another format comprising plural signals each containing information for each pixel, the circuit comprising:

10 a differential stage for determining a difference between a zeroth pixel value and a first pixel value in the first signal, and a difference between the zeroth pixel value and a second pixel value in the first signal;

15 a divider stage for dividing the difference between the zeroth and first pixel values by the difference between the zeroth and second pixel values to produce a constant value; and

20 a processing stage for calculating a value for the first pixel in the second signal from values for the zeroth pixel and the second pixel in the second signal depending on the constant value.

28. A circuit as claimed in claim 27, wherein the processing stage comprises a subtractor for calculating from the constant value an inverse constant value; a first multiplier for multiplying the zeroth pixel value in the second signal by the inverse

constant value to produce a first intermediate value;
a second multiplier for multiplying the second pixel
value in the second signal by the constant value to
produce a second intermediate value; and an adder for
5 adding the first and second intermediate values
together to produce the value for the first pixel in
the second signal.

29. A circuit as claimed in claim 27, wherein the
processing stage comprises a first comparator for
10 comparing the constant value with a first
predetermined value to determine whether the first
predetermined value is greater than the constant
value; a second comparator for comparing the constant
value with a second predetermined value to determine
15 whether the constant value is greater than the second
predetermined value; and a selector for selecting as
the value of the first pixel in the signal the value
of the zeroth pixel in response to a true output from
the first comparator and the value of the second pixel
20 in response to a true output from the second
comparator.

30. A circuit as claimed in claim 29, wherein the
selector comprises an AND circuit responsive to a
false output from both the first comparator and the
25 second comparator; a shift register responsive to the

AND circuit for dividing by two the values of the zeroth pixel and the second pixel in the second signal; and an adder for adding together the two divided values from the shift register to produce the value for the first pixel in the second signal.

31. A circuit as claimed in claim 30, wherein the selector further comprises means for selecting either the value of the zeroth pixel, the value of the second pixel or the value produced by the adder as the value of the first pixel in the second signal depending on the constant value as compared with the first and second predetermined values.



The
Patent
Office

2c

Application No: GB 9607910.8
Claims searched: 1-31

Examiner: John Coules
Date of search: 19 June 1996

Patents Act 1977
Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.O): H4F FGY,FHHX,FGXE,FGXX

Int Cl (Ed.6): H04N 9/64,5/208

Other:

Documents considered to be relevant:


Category	Identity of document and relevant passage	Relevant to claims
X	EP 0705043 A1 (SGS-THOMSON) see abstract	1 and 15
X	EP 0469892 A2 (MATSUSHITA) see whole doc. particularly page 10 and Fig 19	1-5 and 15 at least
X	EP 0340648 A2 (VICTOR) see abstract	1 and 15
X	EP 0302500 A2 (VICTOR) see abstract	1 and 15
X	EP 0224302 A1 (PHILIPS) see abstract	1 and 15

X Document indicating lack of novelty or inventive step
Y Document indicating lack of inventive step if combined with one or more other documents of same category.

& Member of the same patent family

A Document indicating technological background and/or state of the art.
P Document published on or after the declared priority date but before the filing date of this invention.
E Patent document published on or after, but with priority date earlier than, the filing date of this application.

IDS REFERENCES

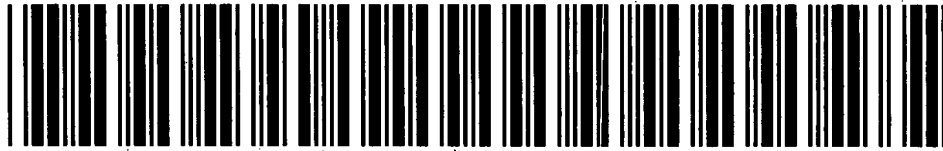

FOR